

# Technical data sheet

## Fire protection duct PYROLINE® Con D BSK I120/E90



Item number: 7215210



Fire protection duct made from water and frost-proof fibreglass light concrete of building material class A1 according to EN 13501-1 for fireproof laying of cables in rescue and emergency routes, and for the maintenance of electrical functionality of safety-relevant systems. Classification I120 as I duct according to DIN 4102 Part 11 and classification E90 as E duct according to DIN 4102 Part 12.

Mounting of the duct directly on walls or under ceilings.

Including countersunk head screws and sealing strips.  
Including countersunk head screws and sealing strip.




Fibreglass lightweight concrete

### Master data

Item number	7215210
Type	BSKD12-K0506
Description 1	Fire protection duct I120/E90
Description 2	Direct mounting
Manufacturer	OBO
Dimension	50x60
Colour	Grey
Material	Fibreglass lightweight concrete
Smallest sales unit	1
Unit of quantity	Metre
Weight	1668 kg
Weight unit	kg/100 m

### Dimensions

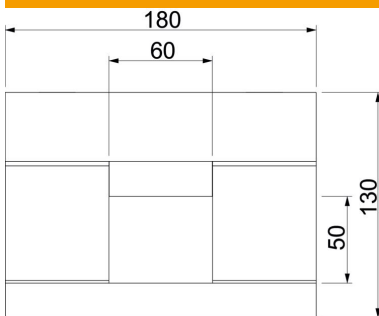

Length	1,000 mm
Width	180 mm
Height	130 mm
Dimension B	180 mm
Dimension b	60 mm
Dimension h	50 mm
Dimension H	130 mm

# Technical data sheet

Fire protection duct PYROLINE® Con D BSK I120/E90

Item number: 7215210



## Technical data

Number of flammable sides	3
Cover fastening	Screw
Fire resistance class E – function maintenance	90
Fire resistance class I – installation duct	120
With perforation	no
Usable cross-section	3000 mm <sup>2</sup>
Partitions possible	yes
Jacketing	Without
Material of the insulation	Glass-fibre lightweight concrete