

Technical data sheet

Insulated air-termination rod

Item number: 5408947



- For the isolated creation of air-termination systems
- Suitable for isFang air-termination rod stand, type isFang 3B-100/150
- Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4
- For installation on the building structure with isFang support
- Fastening of the OBO isCon® conductor possible using accessories
- Suitable for externally routed isCon® conductors
- Aluminium standpipe
- Centre section made of fibre-glass reinforced plastic (GFK)
- Aluminium air-termination tip



GFK Fibre-glass-reinforced plastic

Master data

| | |
|---------------------|--------------------------------|
| Item number | 5408947 |
| Type | isFang 6000 AL |
| Description 1 | Insulated interception rod |
| Manufacturer | OBO |
| Dimension | 6000mm |
| Colour | Light grey |
| Material | Fibre-glass-reinforced plastic |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 600 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Insulated air-termination rod



Item number: 5408947

Dimensions

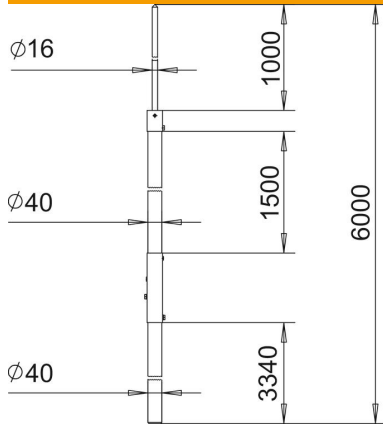

| | |
|------------------|----------|
| Length | 6,000 mm |
| Dimension A | 3,340 mm |
| Dimension B | 1,000 mm |
| Dimension d min. | 40 mm |
| Dimension H | 1,500 mm |

Technical data

| | |
|---|----------------------------|
| Connection | Round conductor |
| Version for High voltage-resistant, insulated version | Air-termination rod yes |