

# Technical data sheet

## MSL4141 mounting rail, slot 22 mm, FT, perforated

Item number: 1122962



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



St

Steel

FT

Hot-dip galvanised

### Master data

Item number	1122962
Type	MSL4141P1000FT
Description 1	Profile rail
Description 2	perforated, slot 22mm
Manufacturer	OBO
Dimension	1000x41x41
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	1
Unit of quantity	Metre
Weight	214.7 kg
Weight unit	kg/100 m


# Technical data sheet

MSL4141 mounting rail, slot 22 mm, FT, perforated

Item number: 1122962



## Dimensions

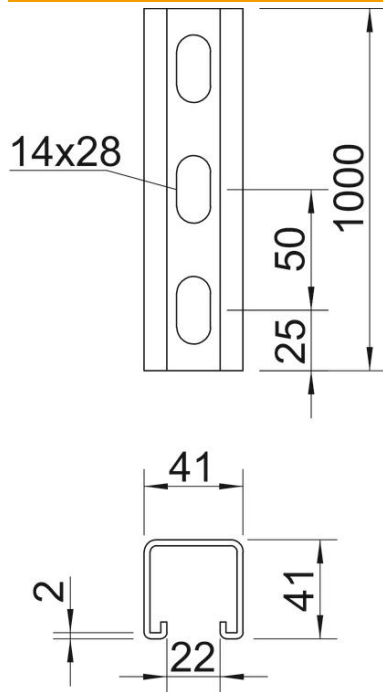

Length	1,000 mm
Width	41 mm
Height	41 mm
Dimension L	1,000 mm

## Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Drill hole spacing, centre	50 mm
Maintain electrical functions	no
Hole size	14x28 mm
Material thickness	2 mm
With perforation	yes
With tothing	yes
Profile shape	C profile
Slot width	22 mm
Static value A	2.45 cm <sup>2</sup>
Static value Iy	5.18 cm
Static value Iz	7.56 cm
Static value Wy	2.51 cm <sup>2</sup>
Static value Wz	2.69 cm <sup>2</sup>